

# Play value

Our Fishing Boat invites young and old adventurers to set off on a tour of discovery. The stern of the ship can be climbed via a ladder, the bow via a climbing net. The two ship elements are connected by a net tunnel so that role-playing games can be extended to the entire ship at any time. The tunnel is an additional exercise and balancing challenge that is fun for little ones and older children alike. And of course, just like a real pirate ship, the Fishing Boat has a steering wheel and a ladder. The sand crane at the stern of the ship completes the experience and gives even younger children the opportunity to become deeply engaged in play with the elements.





**Fishing Boat** 


### **Fundamental characteristics**

- Child-oriented dimensions
- Wooden surface that appeals to the senses
- Emotionally appealing design
- Friendly appearance
- Incentive for playing: role-playing games
- Movement: climbing, balancing

# **Recommended for**

- School children
- Public play areas without supervision, such as playgrounds, parks or similar



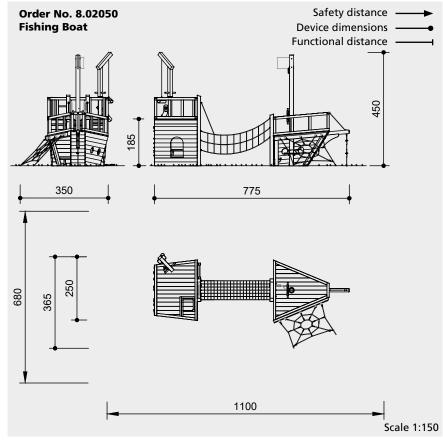

Safety check according to DIN EN 1176

### **Components**

- 1 Bow with floor, railing and steel feet
- 1 Stern with 2 floor elements, railing, side panels and steel feet
- 1 Mast with steel foot and flag made of corrugated stainless steel sheet metal, thickness 2 mm, not rotateable
- 1 Round table
- 1 Net tunnel
- 1 Sand Crane
- 1 Spider Net
- 1 Sand Chute
- 1 Shovel
- 1 Steering Wheel

A kitchen element is optionally available for the stern (**Order No. 8.02055**). This is only recommended for the supervised area and requires a water connection.

### **Installation information**

Surfacing requirements corresponding to a fall height of  $\leq$  2.00 m (please refer to price list for more detailed information)

### **Foundations**

# Bow

1 item 170 x 80 x 60 cm Excavation depth 80 cm 1 item 110 x 70 x 60 cm Excavation depth 80 cm

### Stern

1 item 280 x 80 x 60 cm Excavation depth 80 cm 2 items 60 x 60 x 60 cm Excavation depth 80 cm

# Knot Rope

1 item 30 x 30 x 30 cm Excavation depth 60 cm

# Spider Net

2 items 50 x 50 x 40 cm Excavation depth 80 cm

### Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions.

Technical changes reserved.

# **Dimensions**

(small deviations possible)

Length	7.75 m
Width incl. Net	3.65 m
Height	4.50 m
Weight	1350 kg

#### **Technical information**

Equipment made of mountain larch

#### **Peeled white**

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



#### **Bevel cut**

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



#### Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



# **Tongue and groove**

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain



### Hardwood rungs

Climbing rungs made of hardwood (ash) Ø 4.2 cm, milled and mortised, secured against twisting, easy to grip and not cold for children to touch



### **Richter Hercules type rope**

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



# **Hercules rope**

Hercules rope, for spliced net connections. A compound of steel rope for the core and polyester or polyamide yarn for the sheath. High abrasion resistance, 4 or 6 strands



## **Aluminium rope pressing**

Aluminium rope pressing, cylindrically pressed, with rounded ends



# S-connectors

S-connectors Ø 8.1 mm, made of high-quality stainless steel, rounded



### **Profiled washer**

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



# Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



### **Ground anchor**

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



### **Chains**

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



For more detailed explanation of the quality characteristics see price list.

